



professional control devices

# TwinController • HUMIDITY

Vers. 01-21



Available in:



**4 + 4 AMP**



**12 + 12 AMP**

HYBRID AND MULTIFUNCTIONAL

## Control your environment

Original Dutch brand 

[www.cli-mate.pro](http://www.cli-mate.pro)



Serie: TW.H  
Type: TW.H-4 / TW.H-12

# TwinController • HUMIDITY

Vers. 01-21

## TEMPERATURE, HUMIDITY, MIN. SPEED (IN&OUT), NEGATIVE PRESSURE

### Automatic – professional

- Controls the AIR-intake & AIR-outtake with independent settings
- Fully adjustable, automatic temperature and humidity control
- Total amperage: 8 & 24 amp.
- Easy to calibrate using knobs
- Includes a mounting cooling plate on the back side
- Incorporates a double sensor of temperature and humidity


Controls humidity

Controls the negative pressure

Independent IN & OUT settings

### Technical data

|                        |                         |
|------------------------|-------------------------|
| Temperature range      | : 5 - 55 °C             |
| Humidity range         | : 20-100% rH            |
| Power supply           | : 220/230V – 50Hz       |
| Switching differential | : 1°C / ±5% rH per step |
| Protection class       | : IP44                  |
| Measures               | : 220 x 140 x 110 mm    |

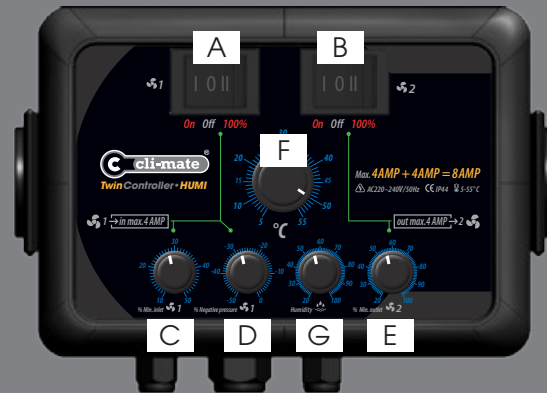

- A = ON/100/OFF button Fan/s 1      E = Min. % Fan/s 2  
 B = ON/100/OFF button Fan/s 2      F = Choose the desired temperature  
 C = Min. % Fan/s 1                      G = Set the desired humidity level  
 D = Negative pressure setting

NOTE: **NEVER** surpass the maximum charge recommended! (AC motors)



The design and the writing of this leaflet have been realized with the most thorough accuracy. We do not take responsibility for printing or typing mistakes.

[www.cli-mate.pro](http://www.cli-mate.pro)

